



FRONT VIEW OF SOCKET

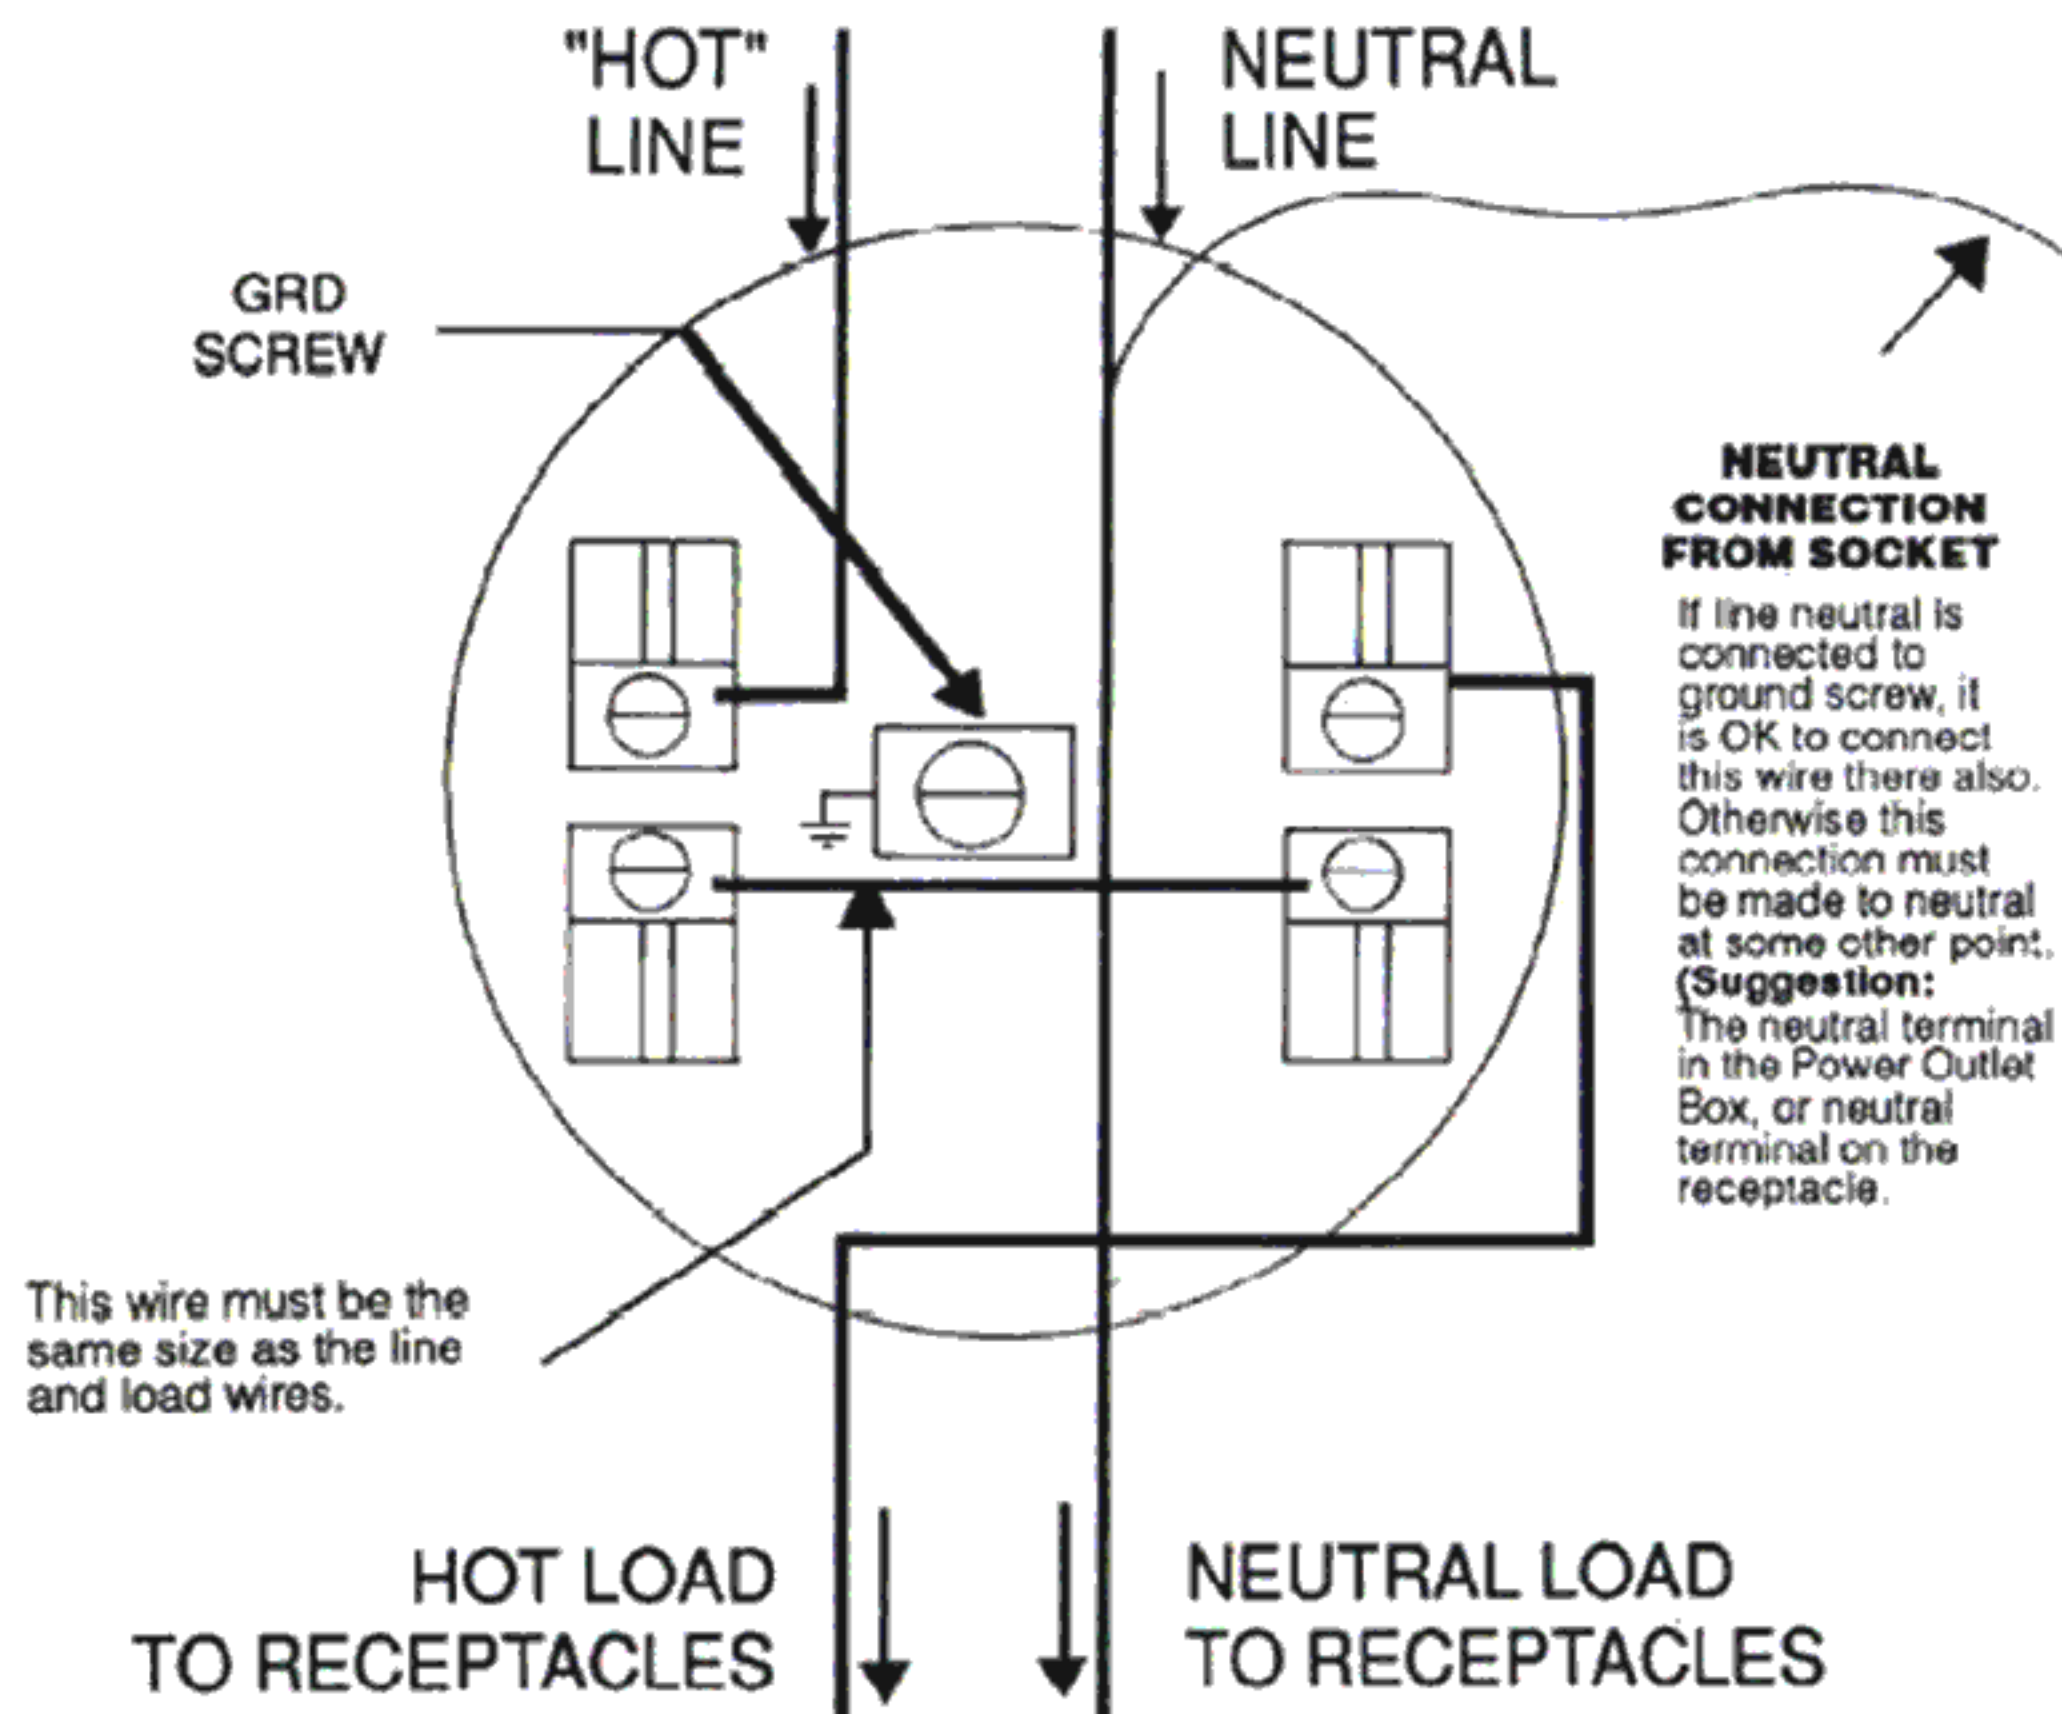

REAR VIEW OF METER

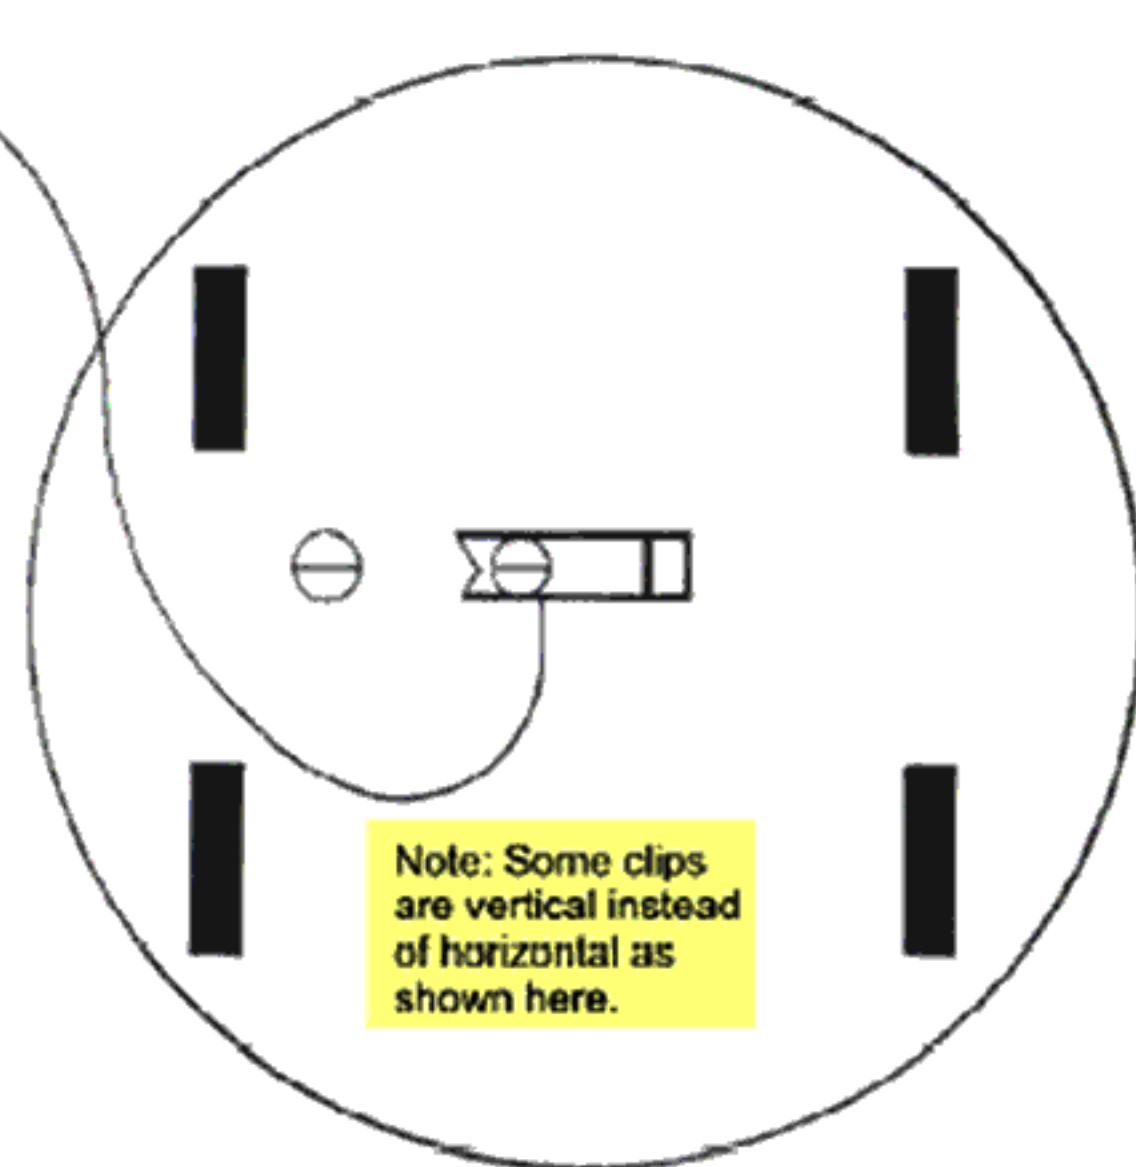

NEUTRAL CONNECTION TO REAR OF METER

Loosen screws and slide clip open as far as possible. Connect a small flexible wire (Wire size #18-22) to the screw on which the clip remains when opened.

WARNING!

Connecting this wire to the wrong screw will trip site breaker, or cause a flash, if not protected by a site breaker.